

ST Optical Fiber Adaptors

V.3.2

Description

FibreFab ST adaptors have high precision alignment sleeves for reliability and better reconnectability. ST adaptors come with a ceramic sleeve for the singlemode and phosphor bronze sleeve for the multimode. The housing is available in double D footprint type.

Features


- ▶ Complies with IEC 61754-2
- ▶ Low insertion loss and high reconnectability capability
- ▶ RoHS, REACH SvHC compliant
- ▶ Available in simplex or duplex

Applications

- ▶ Data processing networks
- ▶ Premises distribution

Technical Specification

OPTICAL PERFORMANCE	CERAMIC	PHOSPHOR BRONZE	CONFORMANCE
Insertion Loss (Typ)	0.1 dB	0.15 dB	IEC 61300-3-4
Mating Durability	500		IEC 61300-2-2
Receptacle Retention Force	1N - 2.5N		IEC 61754-20
Operating Temperature	-25 to +70, 12 cycles		IEC 61300-2-22

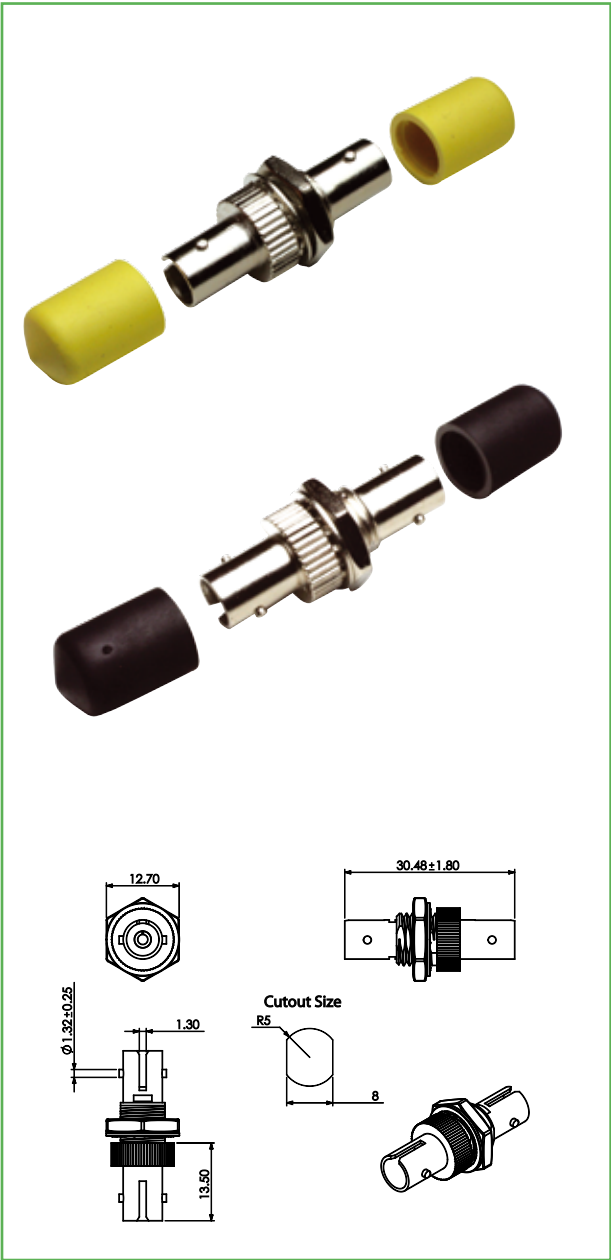

Ordering Information

MODE	TYPE		PART NO.
SM	PC	Simplex	STUZR02
MM	PC	Simplex	STUPHBR
SM	PC	Duplex	STUDZR02METAL
MM	PC	Duplex	STUDPHBRBEIGE



+44 (0) 870 127 3330



+44 (0) 870 127 3331



sales@fibrefab.com



www.fibrefab.com