



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

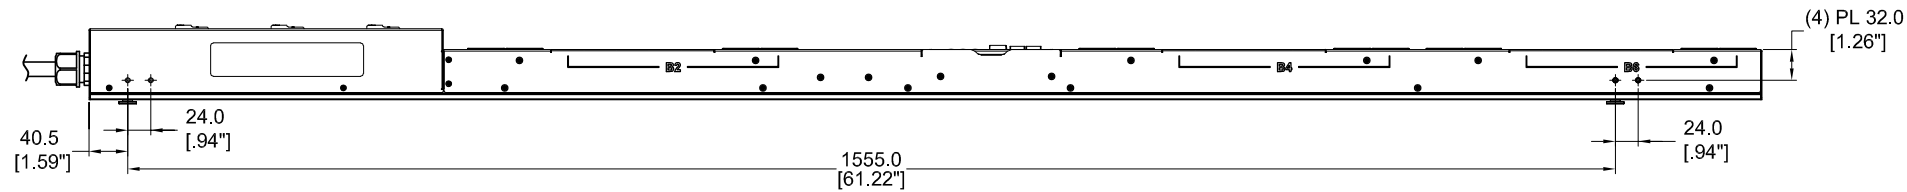


LEFT VIEW

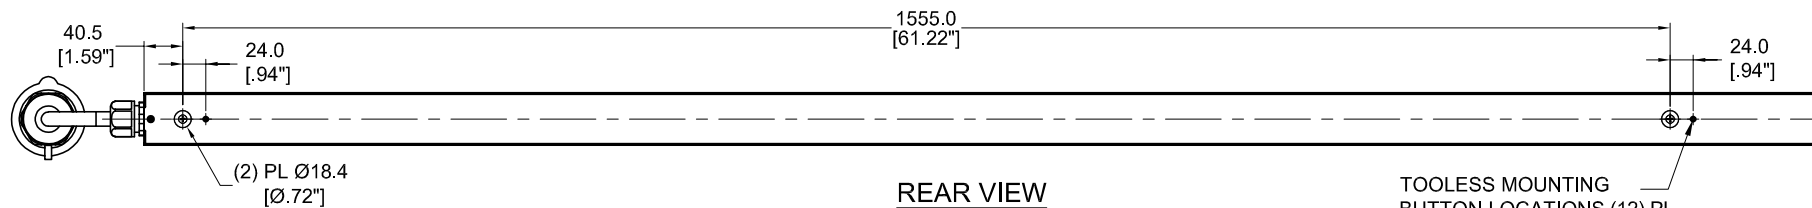


REAR VIEW


TOOLESS MOUNTING
BUTTON LOCATIONS (12) PL

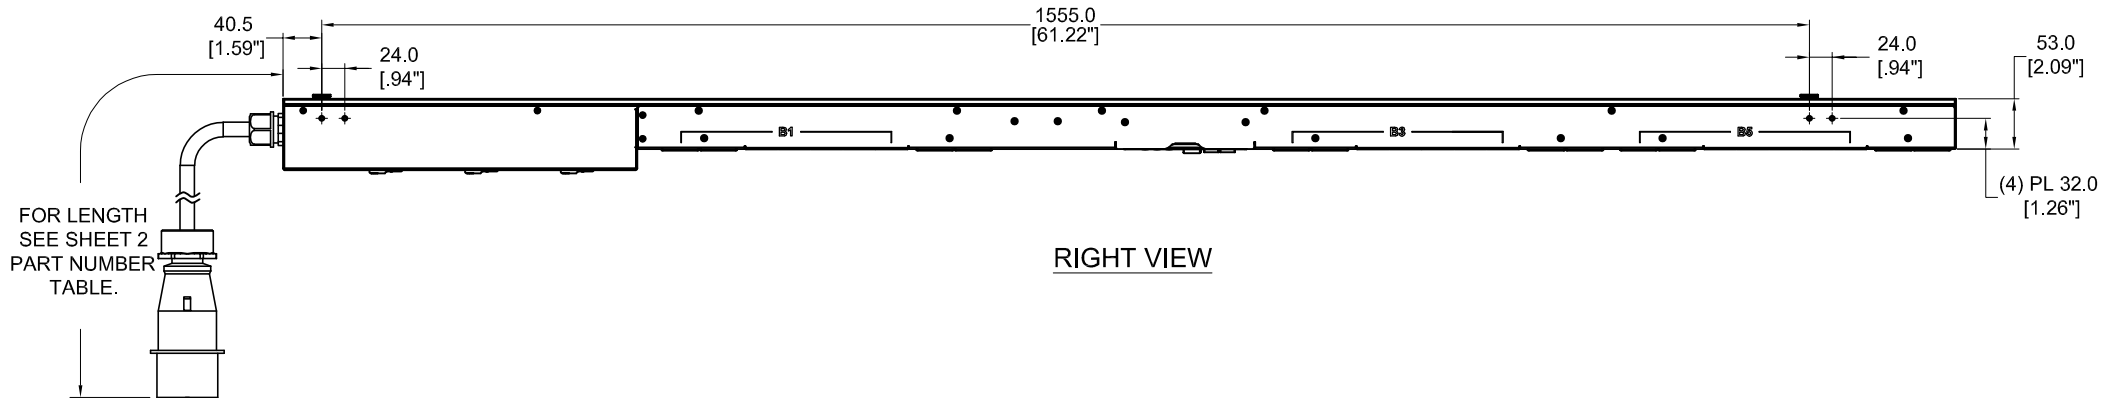

RIGHT VIEW

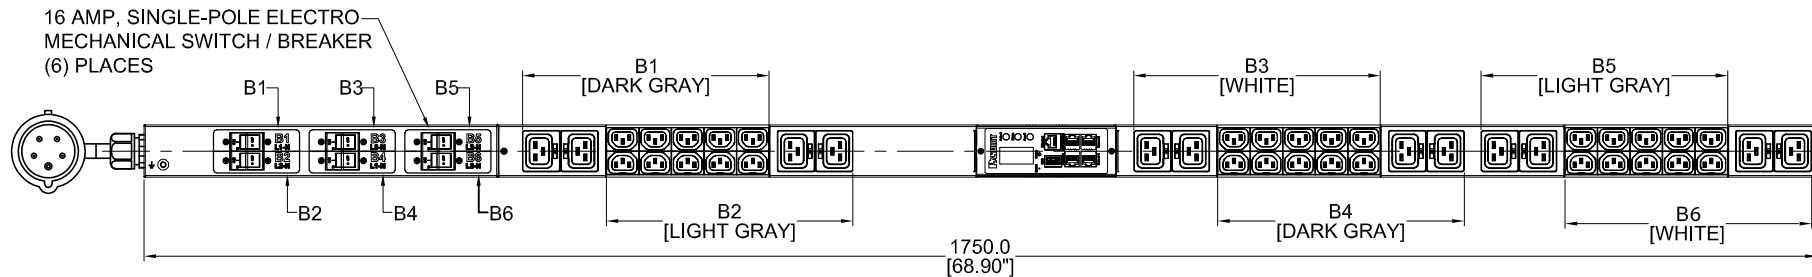

FRONT VIEW



BOTTOM VIEW

XX: FINISHED GOOD COLOR
BL=BLACK YL=YELLOW
RD=RED BU=BLUE
WH=WHITE GN=GREEN

Y: INPUT FEED TYPE
1=TOP-END FED
2=BOTTOM-END FED

Z: INPUT CORD LENGTH
A=1 METER
B=2 METER
C=3 METER

SPECIFICATION:

1. STANDARD:

UNIT TYPE: MONITORED INPUT
ORIENTATION: VERTICAL, 0U, FULL
OUTLET QTY & TYPE: (30) C13, (12) C19
INPUT VOLTAGE: 200-240/346-415VAC
JAPAN INPUT VOLTAGE: 346-415VAC
INPUT CURRENT: 32A
BREAKER QTY & TYPE: (6) 16AMP SINGLE-POLE
INPUT PHASE: THREE-PHASE WYE
RATED POWER: 22.0KVA
INPUT PLUG: IEC 60309 3P+N+E 6H 32A
INPUT POWER CORD: SEE SHEET 2 FOR PART
NUMBER TABLE
REGULATORY STD: RoHS COMPLIANT

2. ADDITIONAL:

NONE

3. ACCESSORIES:

(1) QUICK START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION:

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P42D04M-XX Y Z

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
32A, 346 - 415V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
04A	05/09/2019	MIM	DACU	JAWI	ADDED "JAPAN INPUT VOLTAGE: 346-415VAC" TO SPECIFICATION NOTE 1, SHT 1	P42D04M
03A	06/27/2018	H.XU	MIM	JAWI	ADDITIONAL PART NUMBERS ADDED TO SHEET TWO UPDATED DE-CODER TO INCLUDE BOTTOM-FED OPTION	P42D04M
02A	06/07/2018	WSJ	MIM	EDM	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION "DE-CODER"	P42D04M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P42D04M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	DATE	PRINT
TITLE INTELLIGENT SERIES PDU P42D04M-XXYZ CUSTOMER DRAWING				
ITEM REVISION NAME		PANDUIT		
DATASHEET FILE NAME:		MATERIAL/COLOR: N/A		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		DRAWING NUMBER: P42D04M_DC		
THIRD ANGLE PROJECTION		Tolerance(mm) 0-4<50 ±0.5 50-4<250 ±1.0 250-4<500 ±1.5 500-4<1000 ±2.5 1000-4<2000 ±4.0		SCALE SHT 1 OF 2
DRAWN BY WSJ	DATE 07/17/2017	CHK SEAN	SCALE NONE	SCALE B



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P42D04M	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-BL1A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-BL1B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-RD1A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-RD1B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-RD1C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-WH1A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-WH1B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-WH1C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-YL1A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-YL1B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-YL1C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	10.3kg
P42D04M-BU1A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-BU1B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-BU1C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-GN1A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-GN1B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-GN1C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-BL2A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-BL2B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-BL2C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-RD2A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-RD2B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-RD2C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-WH2A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-WH2B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-WH2C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-YL2A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-YL2B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-YL2C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10' [+10"/-5"]	10.3kg
P42D04M-BU2A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-BU2B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-BU2C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg
P42D04M-GN2A	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3' [+3.5"/-1.75"]	9.7kg
P42D04M-GN2B	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5' [+7"/-3.5"]	10.3kg
P42D04M-GN2C	VERTICAL,(30) C13,(12)C19,MONITORED INPUT, 200-240/346-415V/32A/3 PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10' [+10"/-5"]	10.9kg

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN
DATE
PRINT

TITLE
INTELLIGENT SERIES PDU
P42D04M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

THIRD ANGLE
PROJECTION

Tolerance(mm)
0<1<50 ±0.5
50<1<250 ±1.0
250<1<500 ±1.5
500<1<1000 ±2.5
1000<1<2000 ±4.0

MATERIAL/COLOR:
N/A
DRAWING NUMBER:
P42D04M_DC

DRAWN BY
WSJ

DATE
07/17/2017

CHK
SEAN

SCALE
NONE

SHT 2 OF 2

SCALE
B

04A	05/09/2019	MIM	DACU	JAWI	ADDED "JAPAN INPUT VOLTAGE: 346-415VAC" TO SPECIFICATION NOTE 1, SHT 1	P42D04M
03A	06/27/2018	H.XU	MIM	JAWI	ADDITIONAL PART NUMBERS ADDED TO SHEET TWO UPDATED DE-CODER TO INCLUDE BOTTOM-FED OPTION	P42D04M
02A	06/07/2018	WSJ	MIM	EDM	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION "DE-CODER"	P42D04M
01A	07/17/2017	WSJ	MIM	EDM	INITIAL RELEASE	P42D04M
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2

1