
TX6A™ Category 6A Shielded U/FTP Copper Cable

PANDUIT™
SPECIFICATION SHEET

SPECIFICATIONS

Category 6A cable shall meet the IEC 61156-5 and ANSI/TIA-568.2-E Category 6A component standards. The conductors shall be 23 AWG construction with SFS-PO insulation. Each individual pair shall have a metallic foil shield and all four pairs shall be covered with a low smoke zero halogen (LSZH) jacket. The shielded cable shall provide superior alien crosstalk performance. The TX6A Shielded Cable must be installed as part of the TX6A Shielded Copper Cabling System to achieve certified 10GBASE-T performance.



TX6A Category 6A Shielded U/FTP Copper Cable

LSZH:	**PUFL6X04**-HED**

****Colours: BU (Blue), WH (White), RD Red), OR (Orange), YL (Yellow), GR (Green), VL (Violet), IG (International Gray), or BL (Black)**

TECHNICAL INFORMATION

Electrical performance:	Certified channel performance in a 4-connector configuration up to 100m and exceeds ISO 11801 Class E_A and ANSI/TIA-568.2-E Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the TX6A copper cabling system. Certified component performance up to 100m and exceeds the IEC 61156-5 and ANSI/TIA-568.2-E Category 6A component standards for supporting 10GBASE-T transmission over twisted-pair cabling systems.
Conductors/insulators:	23 AWG bare copper wire covered by SFS-PO insulation
Insulation diameter:	1.27mm - 1.30mm
Flame rating:	IEC 60332-1, IEC 60754, and IEC 61034, EN50575: Euroclass Dca-s2,d2,a1
PoE compliant:	Meets IEEE 802.3af, IEEE 802.3at, and IEEE 802.3bt for PoE applications
Installation tension:	110 N (25 lbf) maximum
Temperature rating:	0°C to 50°C during installation -20°C to 75°C during operation
Cable jacket:	Low Smoke Zero Halogen (LSZH)
Cable diameter:	7.2mm nominal
Cable weight:	25 kg/500m
Packaging:	500m on a reel Package tested to ISTA procedure 1A

KEY FEATURES AND BENEFITS

Packaging:	Packaging Prevents the coupling near-end crosstalk and alien crosstalk between twisted pairs to ensure 10GBASE-T transmission performance
Internal drain wire:	Facilitates grounding of the cable and provides for efficient performance and protection of network investment
Descending length cable markings:	Easy identification of remaining cable reduces installation time and cable scrap

TX6A™ Category 6A Shielded U/FTP Copper Cable

APPLICATIONS


TX6A Shielded Copper Cable is a component of the TX6A Shielded Copper Cabling System. This end-to-end system provides a cost-effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The shielded cabling system provides high performance, excellent EMI suppression, and aids in secure data transmission. The Panduit solution helps ensure organizations efficiently and reliably meet their data transmission needs. Usage of the TX6A Shielded Copper Cabling System include high bandwidth applications within data centers and connections to high-end workstations such as:

- Stacking switches and switch-to-switch links
- Storage area networks
- Aggregation of Gigabit Ethernet channels
- Real-time intensive financial transactions
- Animation
- Scientific modeling
- Medical imaging

ADDITIONAL SPECIFICATIONS

Mechanical Test	
Ultimate breaking strength:	> 400 N (90 lbf)
Minimum bend radius:	8 x cable diameter
Electrical Test	
Nominal velocity of propagation (NVP):	76% nominal
Operating voltage, maximum:	80 V

ENGINEERING DRAWING

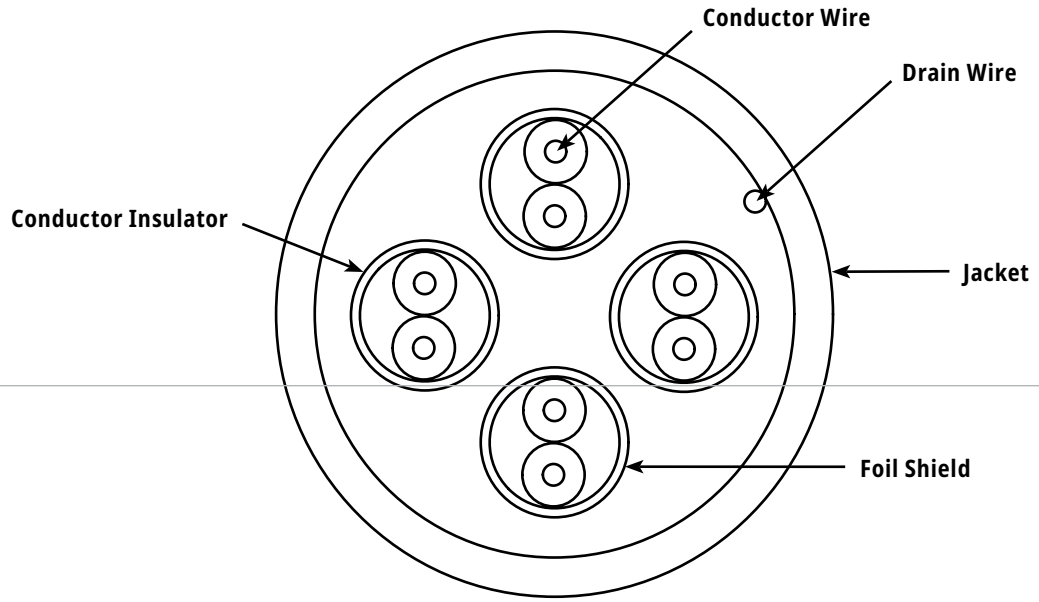

©2026 Panduit Corp. ALL RIGHTS RESERVED. COSP586-WW-ENG 7/2026