PatchRunner[™] 2 Vertical Cable Managers

specifications

The vertical cable manager shall consist of a metal backbone with cable management fingers that align with EIA rack spacing. The fingers shall be molded out of plastic and provide integral bend radius control throughout the entire length. The backbone shall have pass through holes for front to back cabling, with the option to blank off with a plug. The manager shall accept a metal, hinged, push-to-close door that can open to the right or left. The door support brackets shall be integrated into the manager with no assembly required. The manager shall accept plastic slack management spools that can be repositioned as required. The vertical panel shall be able to manage all the cable on the rack without the aid of horizontal cable managers.



key features and benefits

NEW Improved door function	"Push-to-close" door design allows for easy operation
NEW Dual hinged doors are included	Doors ship with managers, simplifying ordering process with less packaging waste
NEW Integrated door brackets	No brackets to install; faster installation while reducing labor costs
NEW Color options	Managers and doors are available in black and white
NEW High Density with increased cable capacity	Up to 17% more usable capacity over existing PRV Vertical Managers
Curved fingers	Support cables as they transition to vertical pathway eliminating need for horizontal managers
Individual fingers	Aligns with rack spaces to simplify cable routing changes
Integral bend radius control	Maintains cable bend radius ensuring network performance and system reliability
Optional snap on vertical retainers	Can be placed on fingers to help retain cables in channel for improved cable management and appearance
Optional slack management spools	Organize and manage patch cord slack allowing for standardization of patch cord lengths

applications

PatchRunner[™]2 Vertical Cable Managers are designed to manage high-density networking equipment in, up to, half the area required by traditional cable management systems. Molded cable management fingers, with integral bend radius control, combine with Panduit angled patch panels to eliminate the need for horizontal cable managers. This frees up rack space for additional patch panels, active equipment, or cable pathways reducing the number of racks that may be required for the network layout. The reduction in square footage combined with fewer components ordered, inventoried and installed results in significant cost savings for the network infrastructure. When used with Panduit connectivity, patch cords, and racks, the user receives a complete cable management solution that maximizes density while minimizing the area required for their network.



SPECIFICAT	ION SHEET
Vertical Cable Man 6.5 foot	agers w/doors –
Dual-sided with tw	vo doors:
6" wide:	PR2VD0679
12" wide:	PR2VD1279
Dual-sided with or	
6" wide:	PR2VSD0679
12" wide:	PR2VSD1279
Single-sided with 6" wide:	PR2VFD0679
12" wide:	PR2VFD1279
Standard EIA Raci	ks – 6.5 foot
2 post rack:	R2P79
4 post rack:	R4P79
4 post rack:	R4PCN79
Vertical Cable Mana Dual-sided with tw	ngers w/doors – 7 foot
6" wide:	PR2VD06 [^]
8" wide:	PR2VD08^
10" wide:	PR2VD10^
12" wide:	PR2VD12 [^]
Dual-sided with or	
6" wide:	PR2VSD06^
8" wide: 10" wide:	PR2VSD08 [^] PR2VSD10 [^]
12" wide:	PR2VSD12 ^A
Single-sided with	
6" wide:	PR2VFD06 [^]
8" wide:	PR2VFD08 [^]
10" wide:	PR2VFD10 [^]
12" wide:	PR2VFD12 [^]
Dual-sided with tw	igers w/doors – 8 foot
6" wide:	PR2VD0696^
8" wide:	PR2VD0896^
10" wide:	PR2VD1096^
12" wide:	PR2VD1296^
Dual-sided with or	
6" wide: 8" wide:	PR2VSD0696^ PR2VSD0896^
10" wide:	PR2VSD1096^
12" wide:	PR2VSD1296^
Single-sided with	one door:
6" wide:	PR2VFD0696^
8" wide:	PR2VFD0896 [^]
10" wide: 12" wide:	PR2VFD1096^ PR2VFD1296^
Standard EIA Rack	
2-Post aluminum i	ack with #12-24
threaded rails:	R2P*^
4-Post steel rack w threaded rails:	R4P*^
4-Post steel rack w	vith cage
nut rails:	R4PCN*^
Accessories 7" front slack man	agamant
spool:	PRSP7
5" rear slack mana	
spool:	PRSP5
End panel:	PR2VEP*^
Cable retainer: Waterfall for use w	WR5E-X
and PR2V manage	
Waterfall for use w	ith R4P 4-post rack
and PR2V manage Pass-through hole	
(kit of five plugs):	PR2VBPK
Pass-through bend	d radius grommets
(Kit of five gromme	
Ex: PR2VEP96 or R2P96	add "96" to end of part number.
Ex: PR2VD06WH or R2PW	add "WH" to end of part number. 'H

technical information

6.5 Foot Managers and Doors

0					
Part Number	RU	Height in (mm)	Width in (mm)	Depth in (mm)	
Dual Sided					
PR2VD0679	42	78.9 (2003)	6.0 (152)	20.7 (526)	
PR2VD1279	42	78.9 (2003)	12.0 (305)	20.7 (526)	
Single Sided			-	-	
PR2VFD0679	42	78.9 (2003)	6.0 (152)	12.0 (305)	
PR2VFD1279	42	78.9 (2003)	12.0 (305)	12.0 (305)	

7 Foot Managers and Doors

RU	Height in (mm)	Width in (mm)	Depth in (mm)		
Dual Sided					
45	83.9 (2130)	6.0 (152)	20.7 (526)		
45	83.9 (2130)	8.0 (203)	20.7 (526)		
45	83.9 (2130)	10.0 (254)	20.7 (526)		
45	83.9 (2130)	12.0 (305)	20.7 (526)		
Single Sided					
45	83.9 (2130)	6.0 (152)	12.0 (305)		
45	83.9 (2130)	8.0 (203)	12.0 (305)		
45	83.9 (2130)	10.0 (254)	12.0 (305)		
45	83.9 (2130)	12.0 (305)	12.0 (305)		
	45 45 45 45 45 45 45 45	45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130) 45 83.9 (2130)	45 83.9 (2130) 6.0 (152) 45 83.9 (2130) 8.0 (203) 45 83.9 (2130) 10.0 (254) 45 83.9 (2130) 12.0 (305) 45 83.9 (2130) 6.0 (152) 45 83.9 (2130) 8.0 (203) 45 83.9 (2130) 8.0 (203) 45 83.9 (2130) 6.0 (152) 45 83.9 (2130) 8.0 (203) 45 83.9 (2130) 10.0 (254)		

* Add "WH" to end of part numbers for white products

8 Foot Managers and Doors

Part Number	RU	Height in (mm)	Width in (mm)	Depth in (mm)		
Dual Sided						
PR2VD0696*	52	95.9 (2435)	6.0 (152)	20.7 (526)		
PR2VD0896*	52	95.9 (2435)	8.0 (203)	20.7 (526)		
PR2VD1096*	52	95.9 (2435)	10.0 (254)	20.7 (526)		
PR2VD1296*	52	95.9 (2435)	12.0 (305)	20.7 (526)		
Single Sided						
PR2VFD0696*	52	95.9 (2435)	6.0 (152)	12.0 (305)		
PR2VFD0896*	52	95.9 (2435)	8.0 (203)	12.0 (305)		
PR2VFD1096*	52	95.9 (2435)	10.0 (254)	12.0 (305)		
PR2VFD1296*	52	95.9 (2435)	12.0 (305)	12.0 (305)		
* Add "WH" to end of part numbers for white products						

1. R2P - 19" Standard EIA Rack 19" x 7, 45 RU


PatchRunner[™] 2 Vertical Cable Managers and Doors 2a. PR2VD06 - 6" wide 2b. PR2VD08 - 8" wide 2c. PR2VD12 - 12" wide

Angled Modular Patch Panels 3a. CPPLA48WBLY - 2 RU, 48-Port

3b. CPPA48HDWBLY - 1 RU, High Density 48 - Port

Cable Management Accessories

- 4. NM4 Cable Manager, 4 RU
- 5. CMT4 Trough, 4 RU
- 6. PR2VEP End Panel
- 7. R2PPR2VWF Waterfall

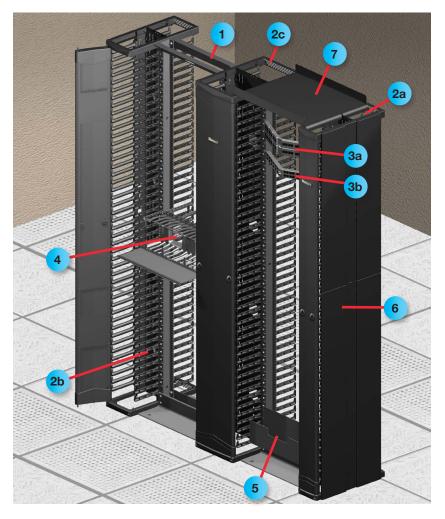

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA Phone: 800.777.3300 PANDUIT EUROPE LTD. London, UK Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD. Republic of Singapore Phone: 65.6305.7575 PANDUIT JAPAN Tokyo, Japan Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA Guadalajara, Mexico Phone: 52.33.3777.6000 PANDUIT AUSTRALIA PTY. LTD. Victoria, Australia Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty



Visit us at www.panduit.com edi@panduit.com ©2019 Panduit Corp. ALL RIGHTS RESERVED. RKSP172--WW-ENG 3/2019