

specifications

Category 6/Class E keyed UTP patch cords shall be constructed of 24 AWG stranded copper cable with a keyed modular plug on one end and a non-keyed modular plug on the other end. Keyed modular plugs shall be mechanically keyed with color-specific positive and negative keying features to prevent unintentional mating with unlike keyed or non-keyed jack modules. Copper conductors in patch cable shall be twisted in pairs and separated by a quadrant separator. All four pairs shall be surrounded by a flame retardant jacket. Patch cords shall be used in all work area outlets and patch panels and shall be compatible with both T568A and T568B wiring schemes.



technical information

Category 6/Class E channel and component performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ANSI/TIA/EIA-568-B.2-1 Category 6 and ISO 11801 Class E standards
	Certified component performance to the ANSI/TIA/EIA-568-B.2-1 Category 6 and ISO 11801 Class E standards
FCC compliance:	Meets ANSI/TIA-968-A; contacts are plated with 50 microinches of gold for superior performance
IEC compliance:	Meets IEC 60603-7
PoE compliance:	Meets IEEE 802.3af and draft requirements of IEEE 802.3at for PoE Plus
UL rated:	No. 1863

key features and benefits

Color-specific keys with positive and negative keying features	Mechanically and visually distinguish connections to prevent unintentional insertion into unlike keyed or non-keyed ports, all network design flexibility and versatility, and accommodate more discrete networks
100% performance tested	Confidence that each patch cord delivers specified performance
Center de-embedded plug	Performs in center of TIA/EIA 568-B.2-1 component range ensuring interoperability and superior performance
Integral pair manager	Optimizes performance, consistency, and reliability by reducing untwist at plug
Patented tangle-free latch	Prevents snags and provides easy release, saving time and providing reliability on frequent moves, adds, and changes
Slender strain relief boot	Provides easy access in high-density applications
Robust construction	Rated to 2500 mating cycles
Identification	Provides identification of performance level, length, and quality control number for future traceability
Variety of colors and lengths	Meets individual length and color-coding requirements for greater system flexibility
Color bands (optional)	Snap onto cable, allowing additional color-coding options

applications

The TX6™ PLUS Keyed UTP Patch Cords are a component of the PANDUIT® TX6™ PLUS UTP Copper Cabling System. Keyed connectivity enables a level of visual and mechanical differentiation, and physical layer security that conventional cabling systems cannot provide. Key applications include:

- Ethernet 10BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet), 10GBASE-T (limited distances as specified in the industry standards)
- 155 Mb/s ATM, 622 Mb/s ATM, 1.2 Gb/s ATM
- Token Ring 4/16
- Digital video and broadband/baseband analog video

TX6™ PLUS Keyed UTP Copper Cabling System

TX6™ PLUS Keyed UTP Patch Cords

Keyed A (black):	UTPKSP*BL
Keyed B (red):	UTPKSP*RD
Keyed C (green):	UTPKSP*GR
Keyed D (yellow):	UTPKSP*YL
Keyed E (orange):	UTPKSP*OR
Keyed F (blue):	UTPKSP*BU

MINI-COM® TX6™ PLUS Keyed UTP Jack Modules

Keyed A (black):	CJK688TGBL
Keyed B (red):	CJK688TGRD
Keyed C (green):	CJK688TGGR
Keyed D (yellow):	CJK688TGYL
Keyed E (orange):	CJK688TGOR
Keyed F (blue):	CJK688TGBU

TX6000™ UTP Copper Cable

Plenum:	PUP6004**~UY
Riser:	PUR6004**~UY

MINI-COM® Angled Flush Mount Modular Patch Panels

24-port, 1RU:	CPPA24FMWBLY
48-port, 2RU:	CPPA48FMWBLY

MINI-COM® Flat Flush Mount Modular Patch Panels

24-port, 1RU:	CPP24FMWBLY
48-port, 2RU:	CPP48FMWBLY
72-port, 2RU:	CPP72FMWBLY

For additional modular patch panels reference www.panduit.com

Tools and Accessories


Patch cord removal tool:	PCRT1
Flashlight kit:	KPCRT1-FL
Patch cord color band:	PCBAND^~Q

*Substitute for length in feet: 3, 5, 7, 10 or 14 feet. Contact customer service for universal reference patch cords.

**To designate color, add suffix BU (Blue), WH (White), YL (Yellow), or IG (International Gray). For additional cable colors, contact customer service.

^To designate color, add suffix WH (White), EI (Electric Ivory), IG (Int'l Gray), BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange) or VL (Violet) before -Q in part number. 25/package


TX6™ PLUS Keyed UTP Patch Cords

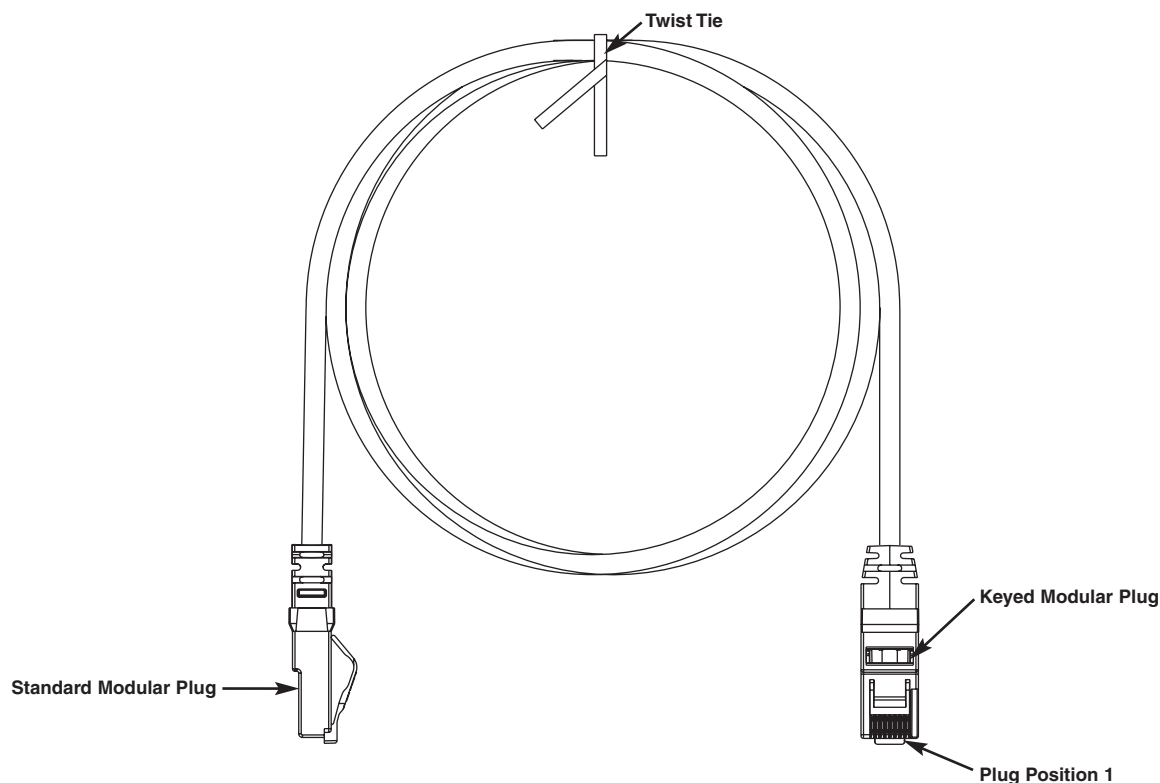

T568B Wiring Scheme

Plug Position	Cable Wire
1	White/Orange
2	Orange
3	White/Green
4	Blue
5	White/Blue
6	Green
7	White/Brown
8	Brown

UTP Patch Cord Color/Key Code

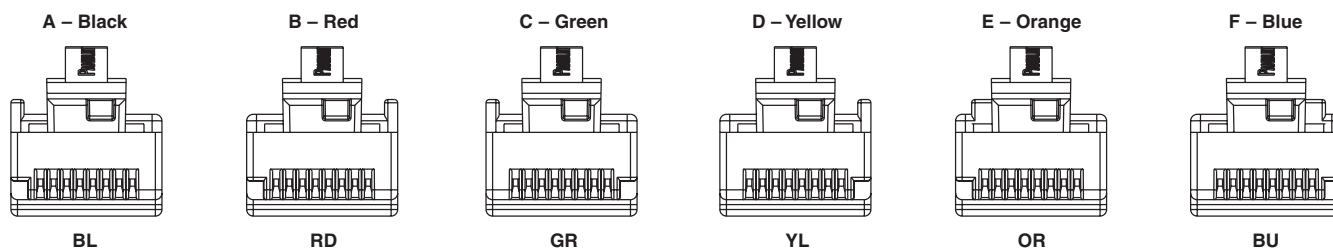

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Jalisco, Mexico
cs-la@panduit.com
Phone: 52.333.777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of PANDUIT product warranties, log on to www.panduit.com/warranty



For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800-777-3300 and reference COSP160

©2009 PANDUIT Corp.
ALL RIGHTS RESERVED.
WW-COSP160
3/2009