

TX5500™ Shielded Copper Cable – F/UTP

specifications

Category 5e cable shall exceed ANSI/TIA-568-C.2 and IEC 61156-5 Category 5e component standards. The conductors shall be 24 AWG construction and the twisted pairs shall be wrapped in an overall metallic foil within a LSZH or PVC jacket.



technical information

Electrical performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds ISO 11801 Class D and ANSI/TIA-568-C.2 Category 5e standards at swept frequencies up to 100 MHz Certified component performance up to 100 meters and exceeds the component requirement of IEC 61156-5 and ANSI/TIA-568-C.2 Category 5e component standards at swept frequencies up to 100 MHz
Conductors/insulators:	24 AWG solid copper with polyethylene (PE) insulation
Flame rating:	LSZH – IEC 60332-1, IEC 60754-1, IEC 60754-2, IEC 61034-2 PVC – IEC 60332-1
Installation tension:	110 N (25 lbf) maximum
PoE compliance:	Meets IEEE 802.3af and IEEE 802.3at for PoE applications
Temperature rating:	0°C to 50°C (32°F to 122°F) during installation -20°C to 60°C (-4°F to 140°F) during operation
Cable jacket:	LSZH – Low Smoke Zero Halogen PVC – Flame-retardant PVC
Cable diameter:	6.0mm (0.236 in.) nominal
Cable weight:	PVC – 18 kg/500m (40 lbs./1640 ft.); 11 kg/305m (24.2 lbs./1000 ft.) LSZH – 20 kg/500m (44 lbs./1640 ft.); 12.2 kg/305m (26.9 lbs./1000 ft.)
Packaging:	500m (1640 ft.) on a reel or 305m (1000 ft.) in a carton Package tested to ISTA procedure 1A

key features and benefits

Foil shield	Reduces ingress of EMI interference to ensure cable performance at high frequency levels
Descending length cable markings	Easy identification of remaining cable reduces installation time and cable scrap

applications

TX5500™ Shielded F/UTP Copper Cable is a component of the Panduit® TX5500™ Copper Cabling System. The TX5500™ System provides end-to-end Gigabit Ethernet performance with usable bandwidth beyond 100 MHz. With certified performance to ANSI/TIA-568-C.2 Category 5e and

ISO 11801 Class D standards, this system will support the following applications:

- Ethernet 10 BASE-T, 100BASE-T (Fast Ethernet), 1000BASE-T (Gigabit Ethernet)
- 115 Mb/s ATM, 622 Mb/s ATM
- Token Ring 4/16

TX5500™ Shielded Copper Cabling System

TX5500™ Shielded F/UTP Copper Cable

LSZH:	PFL5504*
PVC:	PFC5504^

Mini-Com® TX5e™ Shielded Jack Module

Jack module:	CJS5E88TGY
---------------------	------------

TX5e™ Shielded CM/LSZH Patch Cords

Meters:	STPCH**MBBL
----------------	-------------

Mini-Com® All Metal Angled Patch Panels

24-port, 1 RU:	CPA24BLY
48-port, 2 RU:	CPA48BLY
72-port, 2 RU:	CPA72BLY

Mini-Com® All Metal Flat Patch Panels

24-port, 1 RU:	CP24BLY
48-port, 2 RU:	CP48BLY
72-port, 2 RU:	CP72BLY

Cable Prep Tools

Wire stripping tool:	CWST
Wire stripping tool:	CJAST

Color and length:
Replace * with DG-KD (Dark Gray) or WH-KD (White) to designate color in 500m reels; or replace with DG-KG (Dark Gray) or WH-KG (White) to designate color in 305m carton.
Replace ^ with LG-KD (Light Gray) to designate color in a 500m reel; or replace with LG-KG (Light Gray) or IG-KG (International Gray) to designate color in a 305m carton.


**For lengths 1 to 10 meters (increments of one meter) and 0.5, 1.5, 2.5, 15, 20 meters, change the length designation in the part number to the desired length. For boot colors other than Black replace suffix BL (Black) with BU (Blue), RD (Red), GR (Green), YL (Yellow), OR (Orange), or VL (Violet). For example, the part number for a 15-meter patch cord with blue boots is STPCH15MBBU.

TX5500™ Shielded Copper Cable – F/UTP

additional specifications

Mechanical Test	
Ultimate Breaking Strength	>400 N (90 lbf)
Minimum Bend Radius	4 x cable diameter with load 8 x cable diameter without load
Electrical Test	
Nominal Velocity of Propagation (NVP)	67%

cable construction

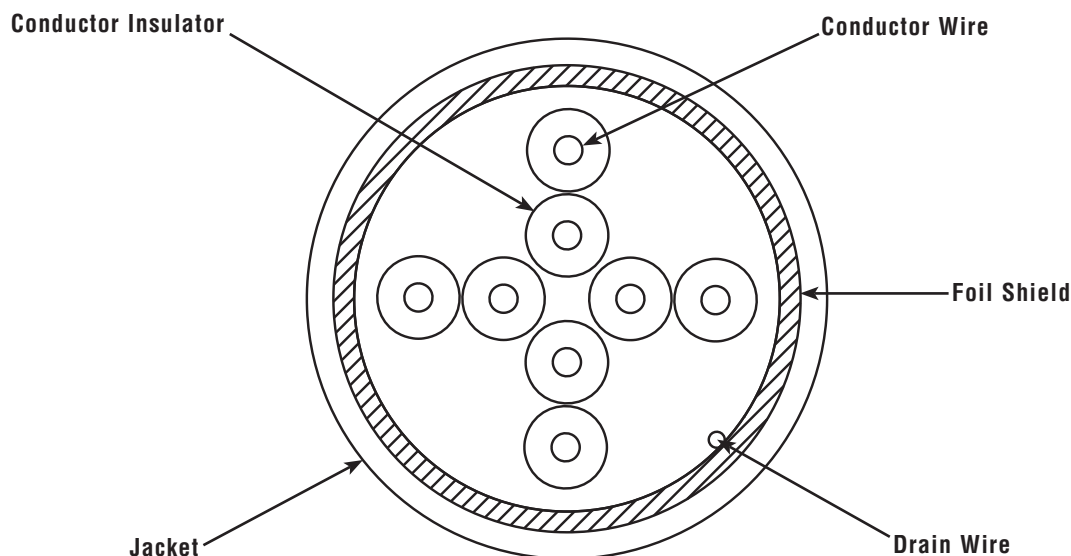

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Markham, Ontario
cs-cdn@panduit.com
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT®

©2014 Panduit Corp.
ALL RIGHTS RESERVED.
COSP298--WW-ENG
11/2014