



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

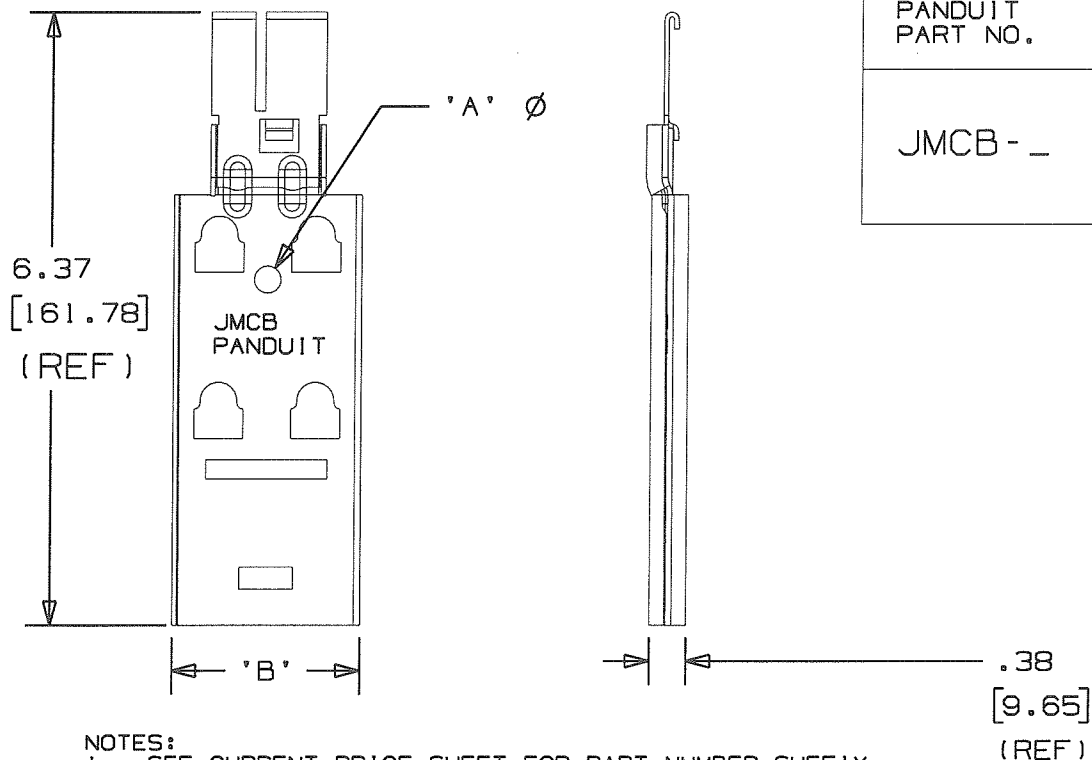

| PANDUIT PART NO. | DIMENSIONS | | WEIGHT lbs / 10 (g) pcs |
|---------------------|----------------|-----------------|-------------------------------|
| | 'A' | 'B' | |
| JMCB - _ | 0.28 (7.14) | 1.96 (49.73) | 1.55 (703) |

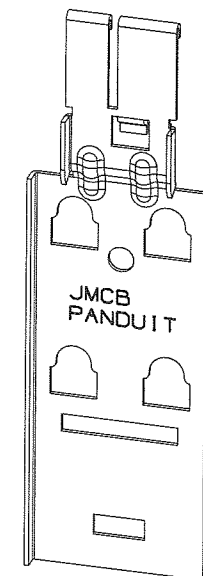

NOTES:

1. SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
2. MATERIAL: 18 Ga. (0.048") HIGH CARBON STEEL.
3. FINISH: ELECTRODEPOSITED ZINC PER ASTM-B-633 (SERVICE CONDITION) SC2, TYPE III WITH BRIGHT LUSTER.
4. JMCB CHAINING BRACKET IS DESIGNED TO WORK WITH PANDUIT JMCMB25-1, JMDWB-1, JMTRB38-1, JMSBCB87-1, AND JMCB TO EXTEND CABLE MANAGEMENT LEVELS. MAXIMUM RECOMMENDED ADDED LEVELS: 2.
5. TWO JMJH2 J HOOK PRODUCTS WILL MOUNT IN A BACK-TO-BACK CONFIGURATION TO THE JMCB AFTER INSTALLATION INTO JMCMB25-1, JMTRB38-1, JMSBCB87-1 AND JMCB. ONLY ONE JMJH2 WILL MOUNT TO THE JMCB AFTER INSTALLATION INTO THE JMDWB-1.
6. RATED STATIC LOAD: 120 lbs. (54.43kg)

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G02672BB_DC_GB2672DF/10A

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

JMOD CHAINING
BRACKET
(JMCB - _)

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ±0.05 (1.3) (.XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.5) ANGLES ± 5°

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

| | | | | | | | | | | | | | |
|-----|----------|------|--|-------------|-----|-----|------|-----|----------|--------|------------|-------------|------------------|
| IOA | 06/09/09 | ARHA | CHANGED NOTES REGARDING MATERIAL AND PLATING, REV. AND FILENAME FORMAT | GB2672DF | IOA | KLP | | | DRAWN BY | JAD | MAT'L: | SCALE | NONE |
| R | 3/7/03 | JAD | INITIAL RELEASE | GB2672DF | R | | | | DATE | 3/7/03 | SEE NOTE 2 | DRAWING NO. | GB2672DF |
| REV | DATE | BY | CHK | DESCRIPTION | ECN | R | CUST | SUP | CHK'D | KLP | | | DWG SIZE A |