


COPPER BRAIDS, PVC INSULATED RATED UP TO 85°C

CLEAR

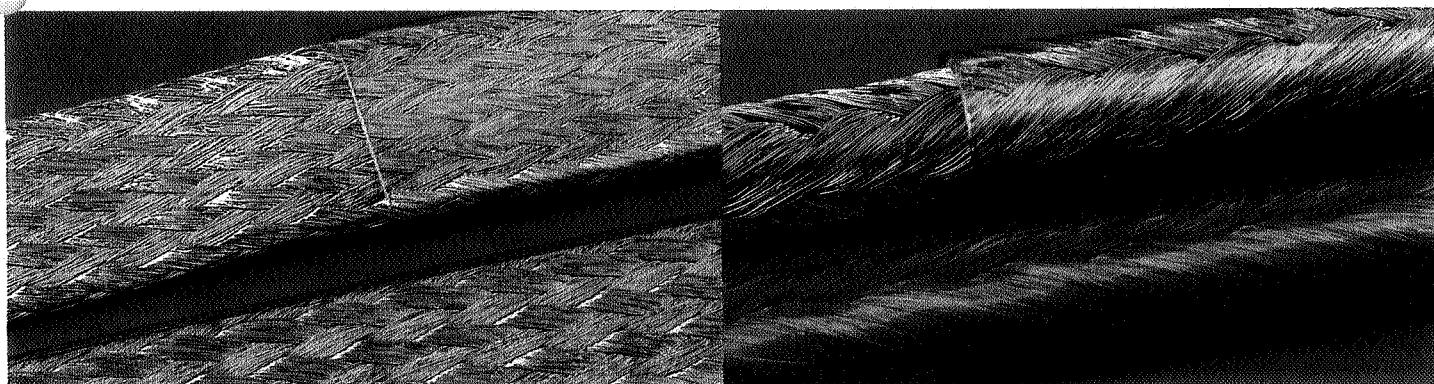

PRODUCT RANGE :

Copper wires to standard NFC 31111.

FLAT TINNED COPPER BRAIDS

Cross sectional area mm ²	Reference	Single wire diameter mm	Dimensions in mm		Packing meters
			Bare braid	PVC insulated overall	
10	12241	0,15	10 x 1,5	12 x 3,5	50
16	11809	0,15	15 x 2	17 x 4	50
25	10400	0,15	25 x 2	27 x 4	50
40	13471	0,20	25 x 3	27 x 5	50
50	13472	0,20	30 x 3,5	32 x 6	50

Please contact us for all other sizes and packing.

ROUND PLAIN COPPER BRAIDS

Cross sectional area mm ²	Reference	Single wire diameter mm	Dimensions in mm		Packing meters
			Bare braid	PVC insulated overall	
6	13028	0,15	4	6	100
10	11979	0,15	5	7	50
16	11305	0,15	6	8	50
20	10405	0,15	7	9	50
25	12358	0,15	8	10	50
30	10406	0,20	9	11	50
35	11636	0,20	9,5	11,5	50
50	10407	0,20	11	13	50
75	10408	0,20	13	15	25
95	10409	0,20	14,5	17,5	25

Please contact us for all other sizes and packing.

DIMENSIONS :

Braids have a degree of elasticity so the dimensions stated above are approximate.